



**HOKKIM**  
Giving You Control

# Control & Protection Relays



**Model :** NOF-5  
**Function :** Over Frequency Relay

### Utilization:

The NOF-5 monitors over frequency of AC mains. It has an adjustable setting of 40 to 60Hz for over frequency. The relay trips if the frequency of the monitored mains rises above the preset point.

Contacts 3-5 close when frequency is below set point and open when frequency is above the set point.

There are also 1 green LED to indicate power and 1 red LED to indicate trip condition.

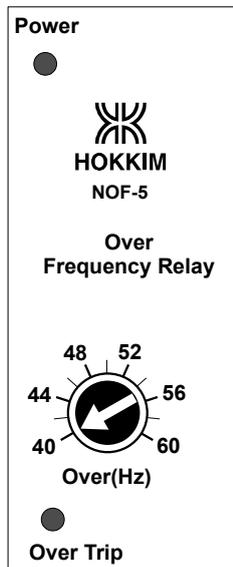

### Technical Data

Supply Voltage	:	<input type="checkbox"/> 240VAC	<input type="checkbox"/> 115VAC
Frequency Adj.	:	40-60Hz	
Consumption	:	1VA	
ON-TRIP Hysteresis	:	1% of rated	
Indication	:	Green LED (Power) Red LEDs (Trip)	
Output Contacts	:	5A 240V 50Hz AC1	
		Normal	3-6 Close 3-5 Open
		Trip	3-6 Open 3-5 Close

