


Model : DSR-03 (Obsolete, replace with PSR-03)
Description : 3-Step Sequence Relay Through Contacts

Utilization:


The DSR-03 will activate only contacts 11-14 when power is supplied to it. When the nominally open contact connected to T1 and T2 is momentarily closed, it will de-activate contacts 11-14 and activate contacts 21-24. Closing T1-T2 momentarily again will cause contacts 21-24 to de-activate and contacts 31-34 to activate.

Repeated closing of T1-T2 will activate the 3 sets of contacts in sequence in repeated cycles.

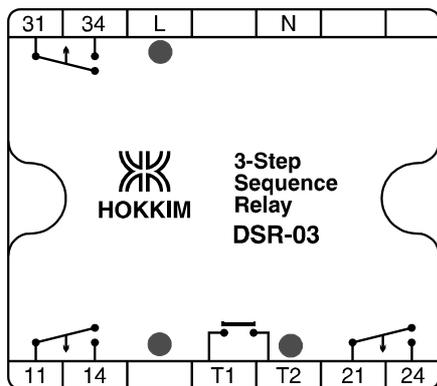


Technical Data


Supply Voltage	: □240VAC □115VAC □24VDC □12VDC
Frequency	: 50/60Hz for AC Supply
Consumption	: 3VA Voltage Circuit
Relay Response Time	: 100 msec.
T1-T2 Contact Response Time	: 200 msec.
Voltage between T1-T2	: 11.5 VDC
Indication	: Red LED (11-14) Red LED (21-24) Red LED (31-34)
Output Contacts	: 5A 240V 50Hz AC1
	Relay ON 11-14 Close 21-24 Close 31-34 Close
	Relay OFF 11-14 Open 21-24 Open 31-34 Open

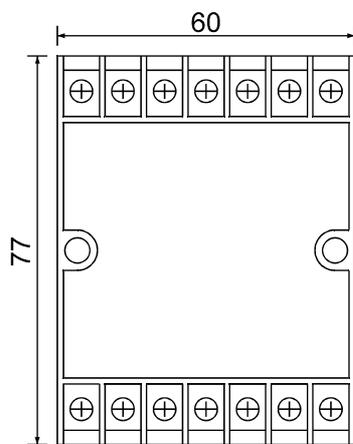

Top View
Dimensions in mm

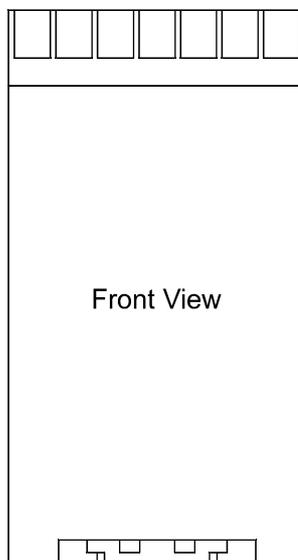

Front View

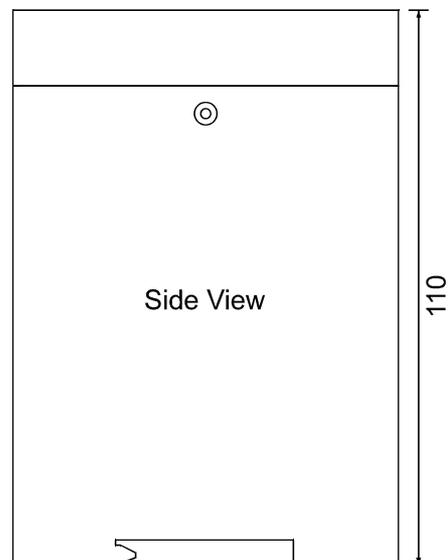

Side View