


Model : TFS-1
 Description : Fixed-Cycle Flasher

Utilization:


When powered on, the output contacts 5-4 or 5-3 of the TFS-1 will flicker OPEN and CLOSE at a rate of 85-100 cycles per minute. It is suitable for flashing a DC or AC lamp up to 240VAC. The volt-free output contacts are rated at 5A 240VAC. To extend the life of the TFS-1 contacts, use the contacts to drive an external relay before driving the load.



Technical Data

Supply Voltage	:	□240VAC	□115VAC
		□24VDC	□12VDC
Frequency	:	□50Hz	□60Hz
Consumption	:	3 VA	
Indication	:	Flashing RED LED	
Output Contacts	:	5A 240V 50Hz AC1	
Relay ON		3-4	Close
		3-5	Open
Relay OFF		3-4	Open
		3-5	Close

Dimensions: The TFS-1 is 40 x 50 x 58mm high and plugged into 8-pin sockets mounted on standard DIN Rail.

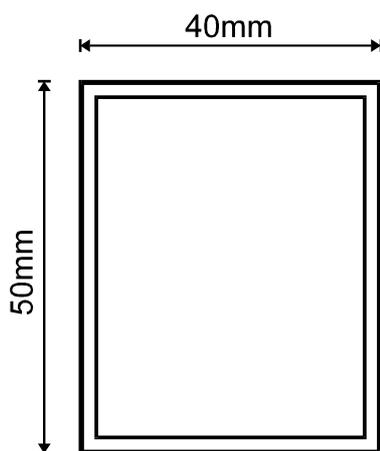


Dimensions

Top View



Front View

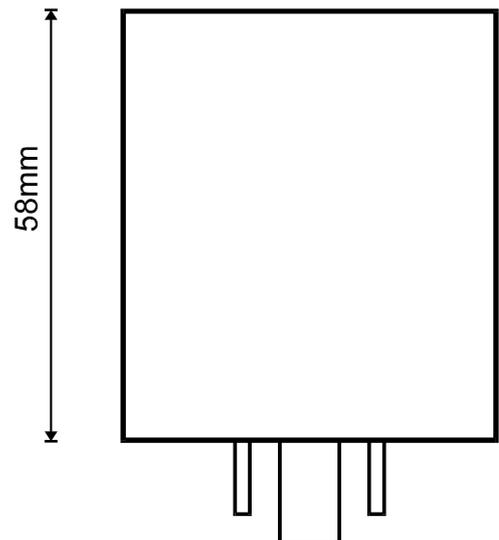

Side View