


Model : **DIR-02**  
 Description : Impulse Relay Through Contacts

### Utilization:

The DIR-02 will energize Relay No.1 when power is supplied to it. When the normally opened contact connected to T1 - T2 is closed momentarily, it will de-energize Relay No.1 and energize Relay No.2. It will toggle between the two Relays every time T1 - T2 is closed and released. The DIR-02 is suitable for controlling the duty and standby cycles of two pumps.

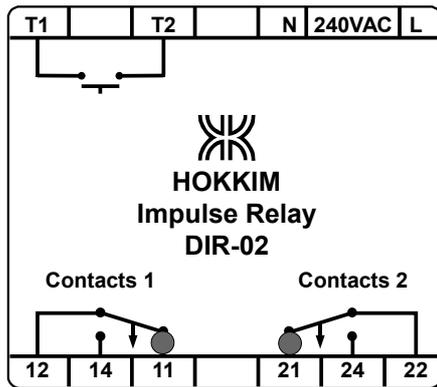

### Technical Data

Supply Voltage	: □240VAC □115VAC
	□24VDC □12VDC
Frequency	: □50Hz □60Hz
Consumption	: 2VA
ON/OFF Response Time	: 100 msec.
T1-T2 Response Time	: >200 msec.
Voltage between T1-T2	: 11.5 VDC
Voltage between R1-R2	: 0.5 VDC
Indication	: Red LED (Relay No.1) Red LED (Relay No.2)
Output Contacts	: 5A 240V 50Hz AC1
	Relay 1 ON 11-14 Close 21-24 Open 11-12 Open 21-22 Close
	Relay 2 ON 11-14 Open 21-24 Close 11-12 Close 21-22 Open

