



HOKKIM
Giving You Control

Control & Protection Relays



Model : NUF-5

Function : Under Frequency Relay

Utilization:

The NUF-5 monitors under frequency of AC mains. It has an adjustable setting of 40 to 60Hz for under-frequency. The relay trips if the frequency of the monitored mains drops below the preset point.

Contacts 9-8 close when frequency is above set point and open when frequency is below set point. There are also 1 green LED to indicate power and 1 red LED to indicate trip condition.

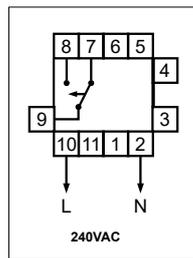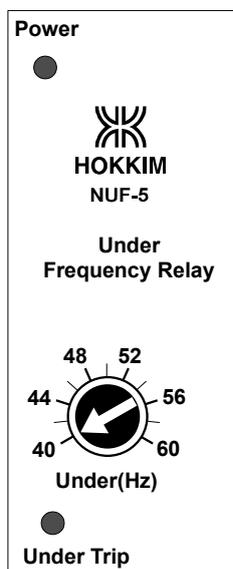

Technical Data

Supply Voltage	: <input type="checkbox"/> 240VAC	<input type="checkbox"/> 115VAC
Frequency Adj.	: 40-60Hz	
Consumption	: 1VA	
ON-TRIP Hysteresis	: 1% of rated	
Indication	: Green LED (Power)	
	: Red LEDs (Trip)	
Output Contacts	: 5A 240V 50Hz AC1	
	Normal	9-7 Close
		9-8 Open
	Trip	9-7 Open
		9-8 Close

