



HOKKIM
Giving You Control

Control & Protection Relays


Model : DUC2-8D

Description : AC Under Current Relay (0-8A) with 2 Contacts and Delay

Utilization:




The DUC2-8D monitors alternating current. Its current setting is adjustable from zero to 8A and the delay setting is adjustable from 0 to 20 sec. The current circuit is connected to terminals S1 and S2 either directly or through current transformers.

The DUC2-8D is designed to sense under current. When the measured current is above the setting, two internal relays will energize and the green Up LED comes ON while the Amber Delay LED and the red Trip LED are OFF. If the current drops below the setting, the Amber Delay LED comes ON; then after the set delay, the relays release and the green Up LED goes OFF while the red Trip LED comes ON. Contacts 11-14 & 21-24 close in the Up condition and open in the Trip or No Supply condition.

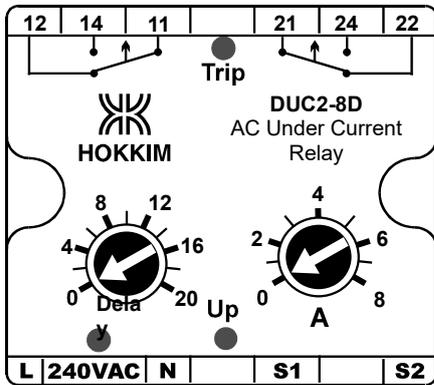

Technical Data

Supply Voltage	: □240VAC □115VAC
	□24VDC □12VDC
Frequency	: 50~60Hz
Consumption	: 2VA Voltage Circuit
	: 1VA Current Circuit
ON/TRIP Hysteresis	: 2% of rated
Current Adjustment	: 0 - 8A
Delay Adjustment	: 0 - 20 Sec
Indication	: Green LED (Up)
	Amber LED (Delay)
	Red LED (Trip)
Dielectric Strength Between:	
Current & Voltage Circuit	: 3KV
Output & Voltage Circuit	: 2KV
Output Contacts	: 2KV
Output Contacts	: 5A 240V 50Hz AC1
Relay Up	11-14 Close
	11-12 Open
	21-24 Close
	21-22 Open
Relay Trip	11-14 Open
	11-12 Close
	21-24 Open
	21-22 Close

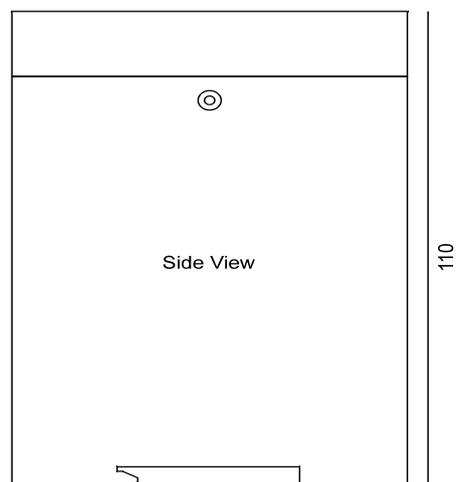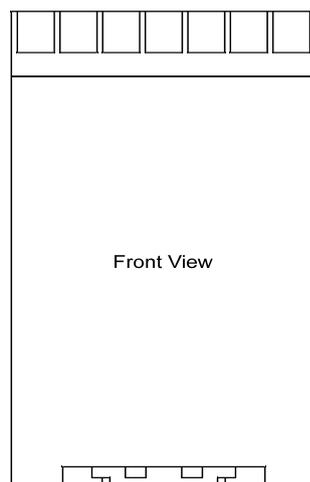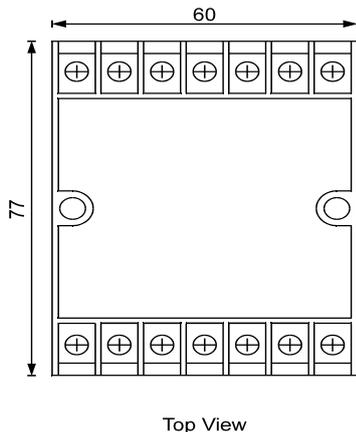

110